


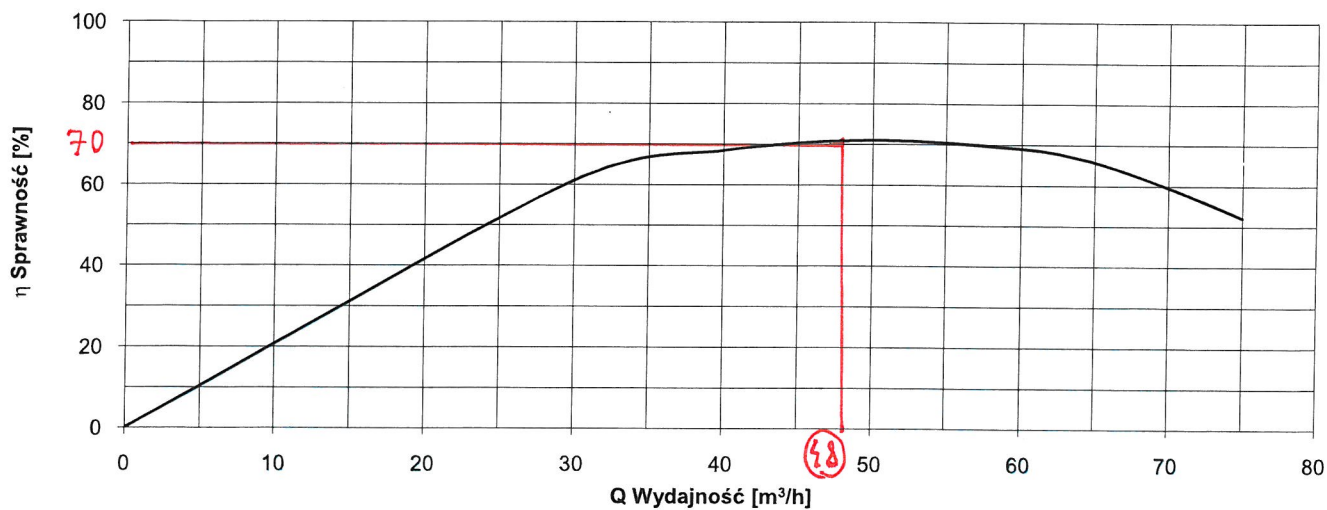


Parametry pracy zgodne z  
PN-EN ISO 9906:1999 kl. 2

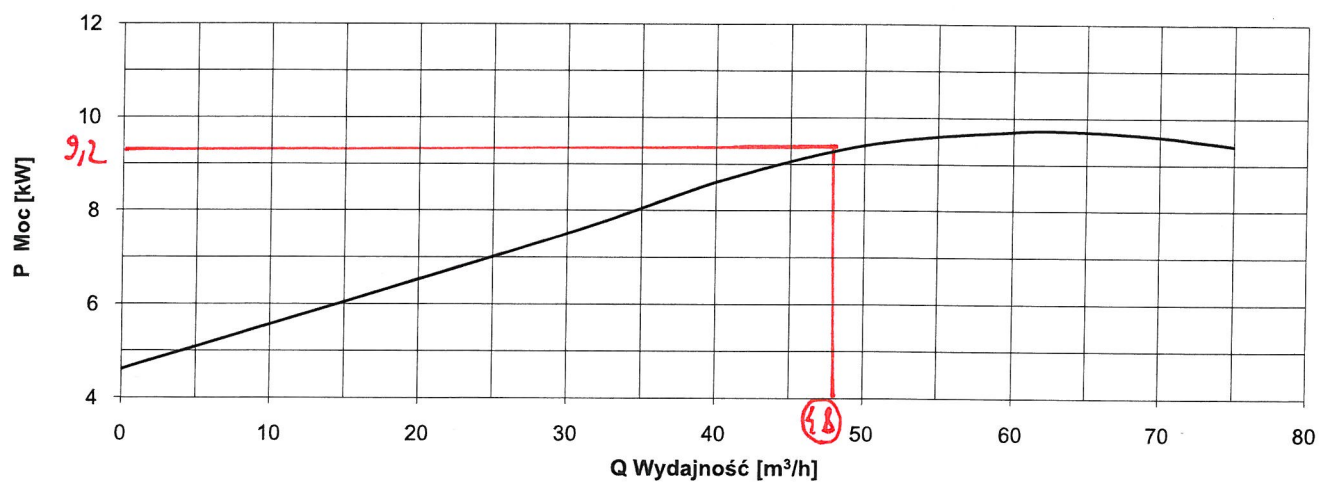



## Charakterystyka pompy GCA.5.A3

50 Hz

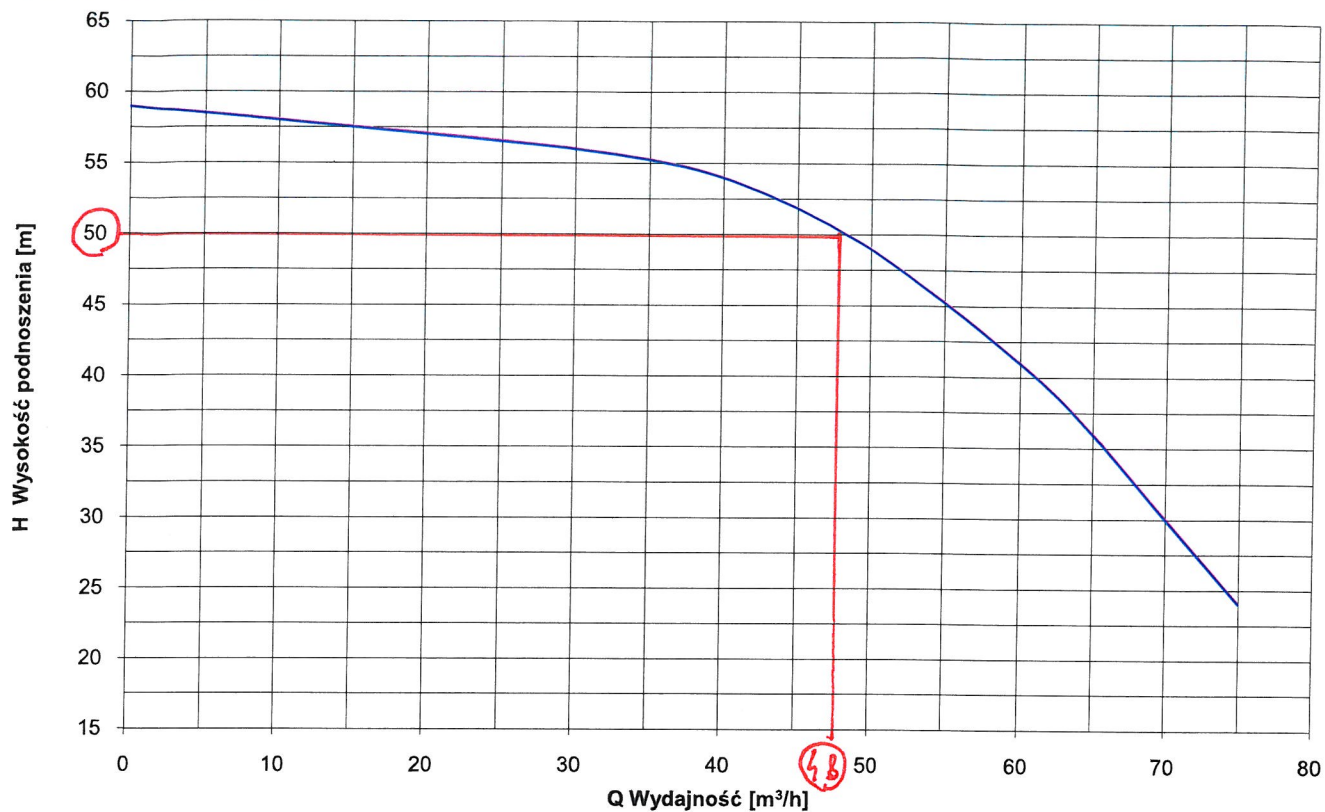

kołnierz/flange/Фланец

DN100 PN16

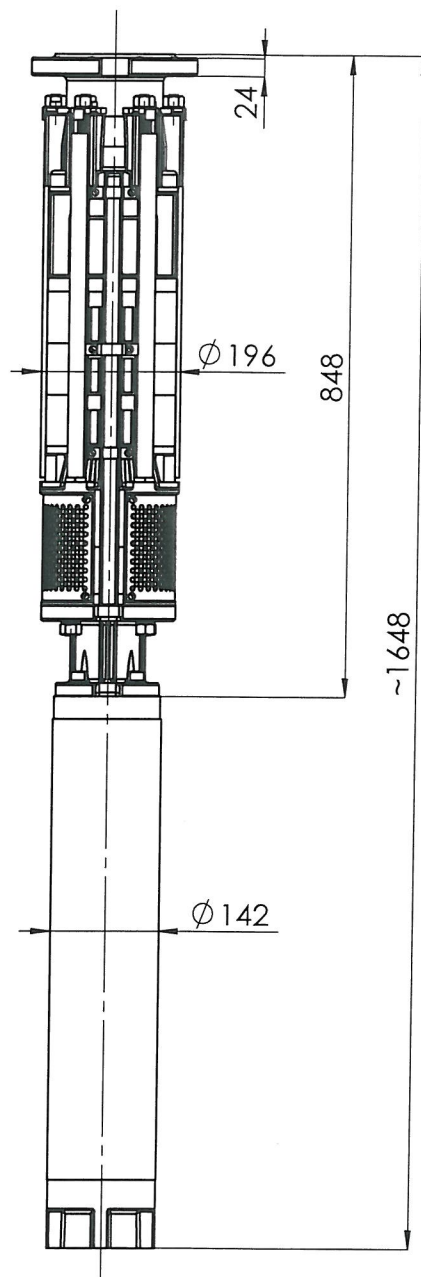

masa/weight/вес: ~112kg	6"	HYDRO-VACUUM S.A. GRUDZIĄDZ ul. Droga Jeziorna 8
GCA.5.03.2110_6_11kW	11kW	
	400/500V	